


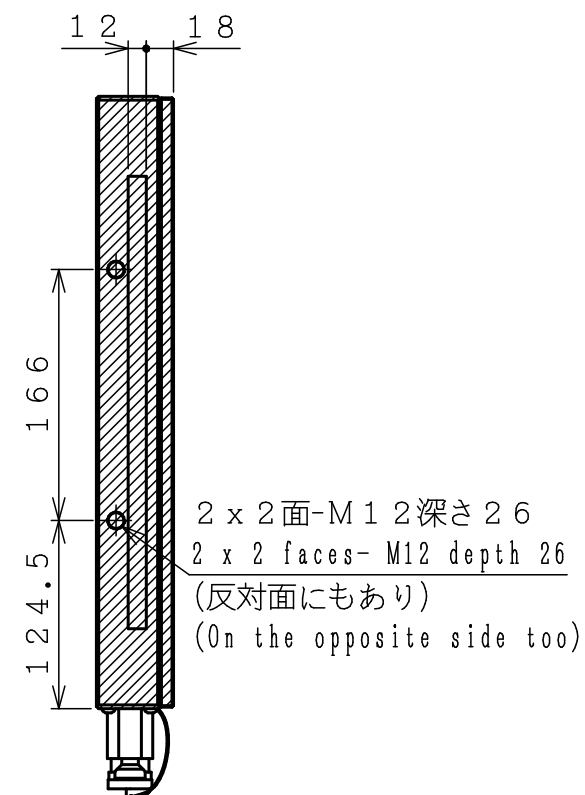

(反対面にもあり)
(On the opposite side too)

Dimensions (mm):

- Overall length: 1425
- Pulley diameter: 170
- Gear diameter: 260
- Shaft diameter: 23
- Mounting offset: 13
- Internal offset: 81
- End offset: 9
- End feature offset: 51
- End feature diameter: GS

- | | |
|---|--|
|  | 貫通加工可能
Through hole can be machined. |
|  | 上面から深さ 2.3 mm まで加工可能
Machining is possible from upper face up to 2.3mm. |
|  | 追加工不可能
Additional machining is not possible. |

- ・ボトムプレートは取り外し不可です。
Please don't remove a bottom plate from chuck body.
- ・全面の加工代（上面：0.5 mm, 下面：1 mm）
Machining allowance for self-cutting (Top: 0.5mm, Bottom: 1mm)

コントローラー Controller	電 圧 Voltage	定格容量 Rating capacity	MODEL No.	MTB410HD70	
			DATE	2013.01.22	株式会社 ナベヤ NABEYA CO.,LTD
—	—	—	SCALE	1/5	
ST200F	200/230V	7.5/9.4kVA	ORDER No.	107673	

株式会社 ナベヤ

NABEYA CO., LTD