

インサートノズルBB型


INSERT NOZZLES No.E-9991BB

RoHS対応

ERON® QPM



■使用例





ノズル先端がネジ式 (E寸法) は、スプレーチップやチューブを取り付けることができます。

材質 真鍮 最大圧力 3MPa 耐熱温度 150℃

取付方法 皿ネジ

- シンプル&コンパクト設計で、取付が容易です。
- 機械や治具に組み込みができ、刃物や治具への干渉がありません。




■仕様・価格表

* 標準在庫品



オーダーNo.	No.	A	B	C	D	E	F	質量g	単品価格	
									1~9個	10個以上
* 108266	BB101-1	10	8.6	0.7	0.7	2.8	50°	5	1,840	1,660
* 108268	BB102-1	10	8.4	0.8	0.8	4.1	44°	5	2,550	2,290
* 108269	BB103-1	10	8	1	1	M6	38°	5	1,840	1,660
* 108270	BB111-1	11	9.8	0.6	0.6	2.8	51°	7.5	2,550	2,290
* 108273	BB112-1	11	9.5	0.8	0.8	4.1	46°	7.5	2,690	2,430
* 108274	BB121-1	12	10	1	1	4.1	46°	7.5	2,690	2,430
* 108277	BB122-1	12	9.8	1.1	1.1	5.6	39°	7.5	2,770	2,490
* 108278	BB141-1	14	12	1	1	4.1	49°	12.5	2,770	2,490
* 108281	BB142-1	14	12	1	1	5.6	44°	12.5	2,770	2,490
* 108282	BB151-1	15	13	1	1	4.1	50°	15	2,870	2,580
* 108285	BB152-1	15	13	1	1	5.6	45°	15	2,870	2,580
* 123212	BB181-1	18	15.8	1.1	1.1	4.1	51°	26	3,220	2,890
* 123213	BB182-1	18	15.8	1.1	1.1	5.6	47°	25	3,220	2,890
* 123214	BB221-1	22	19.4	1.3	1.3	4.1	53°	48	3,220	2,890
* 123215	BB222-1	22	19.4	1.3	1.3	5.6	49°	46	3,310	3,000



■使用例




ノズル先端がネジ式のため、スプレーチップやチューブを取り付けることができます。



■仕様・価格表

* 標準在庫品

オーダーNo.	No.	A	B	C	D	E	F	質量g	単品価格	
									1~9個	10個以上
* 108271	BB111-2	11	7.8	0.9	6.1	M5	30°	7.5	2,550	2,290
* 108275	BB121-2	12	9.1	0.9	6.1	M5	32°	10	2,690	2,430
* 108279	BB141-2	14	10.7	1.1	7.9	M6	34°	15	3,030	2,730
* 108283	BB151-2	15	12	1	7.9	M6	36°	17.5	3,440	3,100
* 123216	BB181-2	18	14.9	1.1	7.9	M6	40°	28	3,490	3,150
* 123217	BB221-2	22	19.1	1.3	7.9	M6	44°	50	3,570	3,230

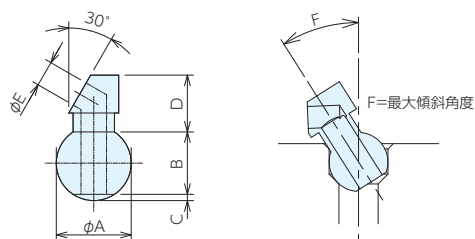

* 標準在庫品

■仕様・価格表

オーダーNo.	No.	A	B	C	D	E	F	質量g	単品価格	
									1~9個	10個以上
* 108267	BB101-3	10	8.5	0.7	6.4	2.8	37°	7.5	3,080	2,770
* 108272	BB111-3	11	9.9	1.1	9.1	4.1	32°	10	3,080	2,770
* 108276	BB121-3	12	10	1	9.1	4.1	33°	12.5	3,080	2,770
* 108280	BB141-3	14	12	1	9.1	4.1	37°	15	3,090	2,780
* 108284	BB151-3	15	12.9	1	9.1	4.1	38°	20	3,690	3,310
* 123218	BB181-3	18	16.2	1.1	9.1	4.1	41°	29	4,140	3,720
* 123219	BB221-3	22	19.2	1.2	9.1	4.1	42°	50	4,180	3,800

■取付穴推奨寸法

No.	A ^{H9}	B	C	D
BB101-1	10 ^{+0.036} ₀	5.2	9	13
BB103-1	10 ^{+0.036} ₀	5.2	9	13
BB102-1	10 ^{+0.036} ₀	5.2	9	13
BB111-1	11 ^{+0.043} ₀	5.7	9.5	13
BB112-1	11 ^{+0.043} ₀	5.7	9.5	13
BB121-1	12 ^{+0.043} ₀	6.3	10	13
BB122-1	12 ^{+0.043} ₀	6.3	10	13
BB141-1	14 ^{+0.043} ₀	7	11	13
BB142-1	14 ^{+0.043} ₀	7	11	13
BB151-1	15 ^{+0.043} ₀	7.5	11.5	13
BB152-1	15 ^{+0.043} ₀	7.5	11.5	13
BB181-1	18 ^{+0.043} ₀	9	13	13
BB182-1	18 ^{+0.043} ₀	9	13	13
BB221-1	22 ^{+0.052} ₀	11	15	13

No.	A ^{H9}	B	C	D
BB222-1	22 ^{+0.052} ₀	11	15	13
BB111-2	11 ^{+0.043} ₀	5.7	9.5	13
BB121-2	12 ^{+0.043} ₀	6.3	10	13
BB141-2	14 ^{+0.043} ₀	7	11	13
BB151-2	15 ^{+0.043} ₀	7.5	11.5	13
BB181-2	18 ^{+0.043} ₀	9	13	13
BB221-2	22 ^{+0.052} ₀	11	15	13
BB101-3	10 ^{+0.036} ₀	5.2	9	13
BB111-3	11 ^{+0.043} ₀	5.7	9.5	13
BB121-3	12 ^{+0.043} ₀	6.3	10	13
BB141-3	14 ^{+0.043} ₀	7	11	13
BB151-3	15 ^{+0.043} ₀	7.5	11.5	13
BB181-3	18 ^{+0.043} ₀	9	13	13
BB221-3	22 ^{+0.052} ₀	11	15	13

■取付穴推奨寸法図

