



フラットベースプレート

RoHS対応

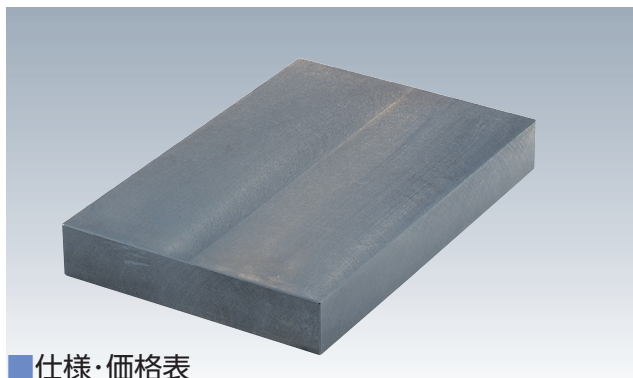

材 質 FC250

熱処理 焼鈍

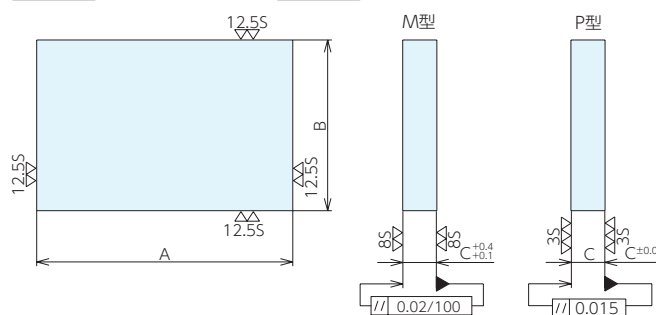

仕様・価格表

No.	A	B	C	質量kg	機械仕上M型			研削仕上P型		
					オーダーNo.	No.	価格	オーダーNo.	No.	価格
604-301	300	80	20	3.6	904573	604-301M	18,500	904836	604-301P	20,400
604-302	300	100	20	4.5	904574	604-302M	21,000	904837	604-302P	23,400
604-303	300	160	20	6.9	904575	604-303M	28,000	904838	604-303P	30,500
604-304	300	200	20	8.7	904576	604-304M	31,900	904839	604-304P	35,800
604-305	300	250	20	10.8	904577	604-305M	36,200	904840	604-305P	40,700
604-306	300	125	25	6.9	904578	604-306M	25,100	904841	604-306P	27,700
604-307	300	200	25	10.8	904579	604-307M	34,400	904842	604-307P	38,400
604-308	300	250	25	13.5	904580	604-308M	57,500	904843	604-308P	61,500
604-309	300	315	25	17.1	904581	604-309M	71,000	904844	604-309P	74,500
604-310	300	160	32	11.1	904582	604-310M	46,400	904845	604-310P	49,300
604-311	300	250	32	17.4	904583	604-311M	64,500	904846	604-311P	68,000
604-312	300	315	32	21.9	904584	604-312M	80,000	904847	604-312P	85,000
604-313	300	400	32	27.9	904585	604-313M	101,000	904848	604-313P	103,000
604-314	300	200	40	17.4	904586	604-314M	61,500	904849	604-314P	65,000
604-315	300	250	40	21.6	904587	604-315M	73,500	904850	604-315P	78,000
604-316	300	315	40	27.3	904588	604-316M	91,500	904851	604-316P	95,000
604-317	300	400	40	34.5	904589	604-317M	114,000	904852	604-317P	117,000
604-318	300	315	50	34.5	904590	604-318M	104,000	904853	604-318P	109,000
604-319	300	500	50	54.8	904591	604-319M	160,000	904854	604-319P	168,000
604-601	600	125	25	13.8	904955	604-601M	60,000	904592	604-601P	66,000
604-602	600	200	25	21.6	904956	604-602M	82,500	904593	604-602P	92,000
604-603	600	250	25	27	904957	604-603M	137,000	904594	604-603P	147,000
604-604	600	315	25	34.2	904958	604-604M	171,000	904595	604-604P	181,000
604-605	600	160	32	22.2	904959	604-605M	112,000	904596	604-605P	118,000
604-606	600	250	32	34.8	904960	604-606M	156,000	904597	604-606P	164,000
604-607	600	315	32	43.8	904961	604-607M	194,000	904598	604-607P	203,000
604-608	600	400	32	55.8	904962	604-608M	240,000	904599	604-608P	250,000
604-609	600	200	40	34.8	904963	604-609M	147,000	904600	604-609P	157,000
604-610	600	250	40	43.2	904964	604-610M	174,000	904601	604-610P	185,000
604-611	600	315	40	54.6	904965	604-611M	218,000	904602	604-611P	227,000
604-612	600	400	40	69	904966	604-612M	274,000	904603	604-612P	282,000
604-613	600	315	50	67.8	904967	604-613M	251,000	904604	604-613P	261,000
604-614	600	500	50	108.0	904968	604-614M	387,000	904605	604-614P	400,000

使用例

