

クランピングスクリュー6890

CLAMPING SCREWS 6890 No.E-9489

RoHS対応

ERON® AMF®




- ラバーキャップ付
- スクリュー強度区分:8.8

参照ページ

ラバーキャップ6893



P.550 ▶

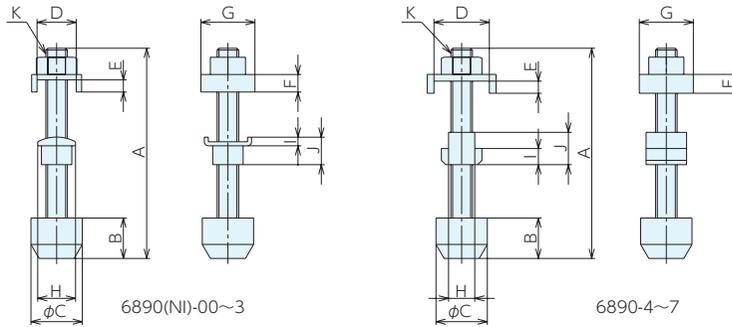

仕様・価格表

* 標準在庫品 * 在庫限りで廃盤

オーダーNo.	No.	ボルト径(並目)	適合機種
* 916546	6890-0	M 4×0.7	6800-0・6830-0・6832-0
* 916547	6890-1	M 5×0.8	6800-1・6802-1・6803-1・6830-1・6832-1
* 916548	6890-2	M 6×1	6800-2・6802-2・6803-2・6830-2・6832-2・6833-2
* 916549	6890-3	M 8×1.25	6800-3・6802-3・6803-3・6830-3・6832-3・6833-3・6895-3
* 916550	6890-4	M 8×1.25	6800-4・6802-4・6830-4・6832-4・6895-4
* 916551	6890-5	M 8×1.25	6830-5・6832-5
* 916552	6890-6	M12×1.75	6800-5・6802-5
* 916553	6890-7	M12×1.75	6800-6・6802-6・6895-6
* 950521	6890NI-00	M 4×0.7	6830NI-0
* 950522	6890NI-0	M 4×0.7	6800NI-0
* 950523	6890NI-1	M 5×0.8	6800NI-1・6830NI-1
* 950524	6890NI-2	M 6×1	6800NI-2・6830NI-2
* 950525	6890NI-3	M 8×1.25	6800NI-3・6830NI-3

No.	A	B	C	D	E	F	G	H	I	J	K(並目)	質量g	価格
6890-0	33.5	8.5	11	8	1.8	3	9	10	5	10	M4×0.7	5	1,640
6890-1	40	10	12.5	11	3.3	4.5	11	11	5	10	M5×0.8	10	1,680
6890-2	47	12	15	12	3.3	4.5	11	11	5	11	M6×1	22	1,740
6890-3	60	15	19	15	5.4	7.4	14	18	5	12	M8×1.25	40	1,780
6890-4	80	15	19	19	5.6	8	20	10	6	12	M8×1.25	62	2,070
6890-5	80	15	19	22	4.6	7	20	10	6	12	M8×1.25	62	2,490
6890-6	100	20	26	24	6	9	30	14	8	16	M12×1.75	160	3,200
6890-7	130	20	26	24	6	9	30	14	8	16	M12×1.75	180	3,330
6890NI-00	32	8.5	11	8	1.8	3	9	9	4	9	M4×0.7	5	5,400
6890NI-0	32	8.5	11	8	1.8	3	9	10	5	10	M4×0.7	5	5,400
6890NI-1	38	10	12.5	11	3.3	4.5	11	11	5	10	M5×0.8	10	5,500
6890NI-2	45	12	15	12	3.3	4.5	11	11	5	11	M6×1	22	5,550
6890NI-3	58	15	19	15	5.4	7.4	14	18	5	12	M8×1.25	40	5,650